


Gewindestifte mit Innensechskant und Spitze

Hexagon socket set screws with cone point
Vis sans tête à six pans creux, à bout pointu

DIN 914
ISO 4027

A 4
ANSI 316

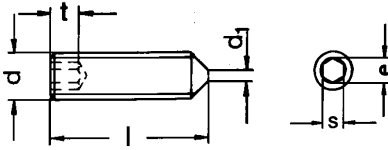

d ₁ max.	-	-	-	1,5	2	2,5	3	4	5
t min.	1,2	1,5	2	2	3	4	4,5	6,4	8
e	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43
s	1,5	2	2,5	3	4	5	6	8	10
d	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
l (mm)									
3	30,10								
4	26,30								
5	25,70	26,60	27,80						
6	26,30	27,-	28,-	35,60					
8	27,30	27,90	29,10	36,80	47,50				
10	29,90	30,40	30,60	37,80	47,50	76,10			
12	34,80	31,90	34,80	39,70	51,-	81,80	198,-		
16		37,80	43,-	47,20	61,30	88,40	200,-	378,-	
20		40,20	49,-	54,70	74,10	110,-	207,-	426,-	
25		49,-	53,60	60,30	83,30	123,-	231,-	509,-	
30			57,70	68,50	97,60	135,-	258,-	533,-	963,-
35				74,60	106,-	152,-	284,-	540,-	981,-
40				80,20	118,-	163,-	312,-	592,-	1036,-
45					131,-	179,-	352,-	638,-	1062,-
50					138,-	193,-	384,-	690,-	1079,-
60							394,-	736,-	1104,-
70							541,-	787,-	1196,-
80								838,-	1273,-
90								899,-	
100								956,-	
	500	500 ab 25 200	500 ab 25 200	500 ab 25 200	200	100	100 ab 40 50	25	25

€ **Preise** / Prices / Prix ... 100 Stück / pcs.

Bestellbeispiel / example for ordering / exemple de commande: **DIN 914 - A 4 - M 10 x 40**

Siehe auch DIN 553.
See also DIN 553.
Voir aussi DIN 553.