


DIN 933 SZ
ISO 4017


A 2
AISI 304

Sechskantschrauben mit Schlitz

Hexagon head screws with slot, fully threaded

Vis à tête hexagonale, entièrement fileté, fendue

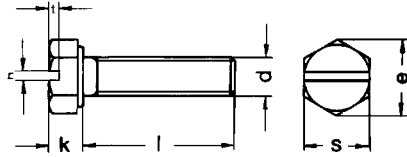

	2	2,8	3,5	4	5,3
k	2	2,8	3,5	4	5,3
e	6,01	7,66	8,79	11,05	14,38
s	5,5	7	8	10	13
t	0,8	1,1	1,4	1,6	2,1
n	0,8	1	1,2	1,6	2
d	M 3	M 4	M 5	M 6	M 8
l (mm)					
5	16,10				
6	15,-	15,-	26,30		
8	12,70	12,70	14,80	17,80	
10	12,50	12,50	14,50	16,60	
12	12,10	12,10	14,10	16,60	27,60
14		13,80	15,80		
16	12,10	11,10	13,20	14,60	22,70
18			14,50	16,70	25,30
20	13,50	11,50	13,50	15,30	22,70
25		12,20	15,-	16,-	24,60
30		12,80	15,70	16,90	25,30
35		17,10	17,-	17,60	26,30
40			20,60	18,60	27,60
45				23,50	29,30
50				24,70	30,40
	1000	500	500	500 ab 16 200	200 ab 25 100

€ Preise / Prices / Prix ... 100 Stück / pcs.

Bestellbeispiel / example for ordering / exemple de commande: **DIN 933 SZ - A 2 - M 4 x 10**

Bei den Abmessungen M 10 (SW 16), M 12 (SW 18), M 14 (SW 21) und M 22 (SW 34) ändern sich nach ISO 4017 gegenüber DIN 933 die Schlüsselweiten (siehe Kapitel "Technik").

Compared with DIN 933 the key-sizes of M 10 (key-size 16), M 12 (key-size 18), M 14 (key-size 21) and M 22 (key-size 34) will be changed according to ISO 4017 (see chapter "Technique").

Dans les dimensions M 10 (Sp 16), M 12 (Sp 18), M 14 (Sp 21) et M 22 (Sp 34) les surplats de la ISO 4017 diffèrent de ceux de la DIN 933 (voir chapitre "Technique").