



Sechskantschrauben mit Schlitz

Hexagon head screws with slot, fully threaded
Vis à tête hexagonale, entièrement filetée, fendue

DIN 933 SZ
ISO 4017

A 4
AISI 316

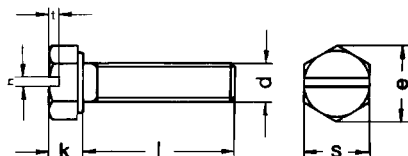

	2	2,8	3,5	4	5,3
k	2	2,8	3,5	4	5,3
e	6,01	7,66	8,79	11,05	14,38
s	5,5	7	8	10	13
t	0,8	1,1	1,4	1,6	2,1
n	0,8	1	1,2	1,6	2
d	M 3	M 4	M 5	M 6	M 8
l (mm)					
5	19,60				
6	17,60	17,60	33,50		
8	16,10	16,10	18,70	24,-	
10	15,90	15,90	18,50	23,-	
12	15,40	15,40	18,-	22,10	39,10
14		16,70	19,30		
16	15,40	14,20	17,30	20,10	34,50
18			19,30	23,10	39,10
20	17,10	14,50	17,90	20,80	34,50
25		15,70	18,90	21,60	34,70
30		16,70	20,10	22,80	35,70
35		22,20	23,90	24,60	37,80
40			26,90	26,10	38,80
45				30,70	42,60
50				33,50	44,30
	1000	500	500	500 ab 16 200	200 ab 25 100

€ Preise / Prices / Prix ... 100 Stück / pcs.

Bestellbeispiel / example for ordering / exemple de commande: **DIN 933 SZ - A 4 - M 5 x 20**

Bei den Abmessungen M 10 (SW 16), M 12 (SW 18), M 14 (SW 21) und M 22 (SW 34) ändern sich nach ISO 4017 gegenüber DIN 933 die Schlüsselweiten (siehe Kapitel "Technik").

Compared with DIN 933 the key-sizes of M 10 (key-size 16), M 12 (key-size 18), M 14 (key-size 21) and M 22 (key-size 34) will be changed according to ISO 4017 (see chapter "Technique").

Dans les dimensions M 10 (Sp 16), M 12 (Sp 18), M 14 (Sp 21) et M 22 (Sp 34) les surplats de la ISO 4017 diffèrent de ceux de la DIN 933 (voir chapitre "Technique").